


MODEL No.	DESCRIPTION:
3210	37MM Short Range Smoke
3220	37MM CN Short Range
3230	37 MM CS Short Range
	Revision A 01/14

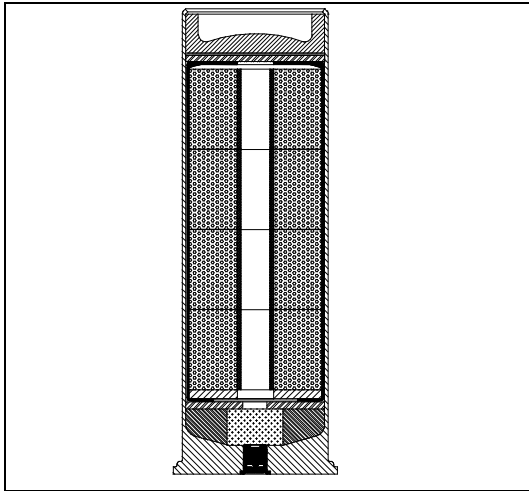

NOT TO SCALE

PHYSICAL & OPERATIONAL	
Type	Irritant & Smoke Pyrotechnic Projectiles
Caliber	37MM / 40MM
Weapon Compatibility	37MM 1.5" Riot Guns / M79 Type Grenade Launcher
Cartridge Length *	4.9" (124.4 mm)
Effective Range**	80 yards (73 m)
Overall Weight	210 gm
Discharge Time	20 - 40 Seconds
Warranty	5 Years From Shipment Date
<p>All specifications are average and are subject to change without notice.            All performance specifications are based on testing conducted in Jamestown, PA USA,            At an elevation of 1,058 feet above sea level at ambient temperature conditions.</p>	

**WARNING:** CSI manufactures a variety of CTS less lethal products which are under pressure, pyrotechnic, incendiary, emit projectiles, generate smoke, or are explosive in nature. When used in accordance with CTS training guidelines and the individual agency's policy, they are intended to cause varying degrees of pain and injury, which are temporary. These products are restricted to law enforcement, corrections, and military personnel and are used to gain compliance, disperse crowds, restore order, or temporarily incapacitate dangerous persons. In rare circumstances, CTS less-lethal products may cause damage to property, serious bodily injury or death. Therefore, any person using the force option depicted on this page should receive proper training to ensure the safest and most effective use.

SHIPPING INFORMATION	
Proper Shipping Name	Ammunition Smoke
UN Number	0303
Hazard Class	1.4G
Labels Required	Explosive 1.4G
Quantity Per Package	96 Cartridges
Total Package Weight	50 lb.
Package Type	UN Specification 1A2/Y36/S Metal Drum with Lever Lock Lid
Package Dimensions	19x12 (Also used for Overnight Packages)
Net Explosive Weight	85.12 gm

\*These muzzle munitions are designed with a "dual-rim" enabling the operator to chamber the round in both 37MM and 40MM Launchers. However, only 37MM will deliver optimum performance as stated in this specification sheet.

\*\*Effective range is dependent upon environmental factors, especially wind.