


MILITARY & LAW ENFORCEMENT





HIGH TECH WITH TRADITION. Nothing describes the outstanding competence of arms manufacturer STEYR ARMS and its employees better. Since its foundation in 1864, STEYR ARMS has developed and produced military, law enforcement and hunting weapons whose quality, reliability and precision are legendary. Any shooter who values these qualities will cherish a STEYR ARMS rifle not only for its lasting value but also for its competitive strength, reliability and long service time.



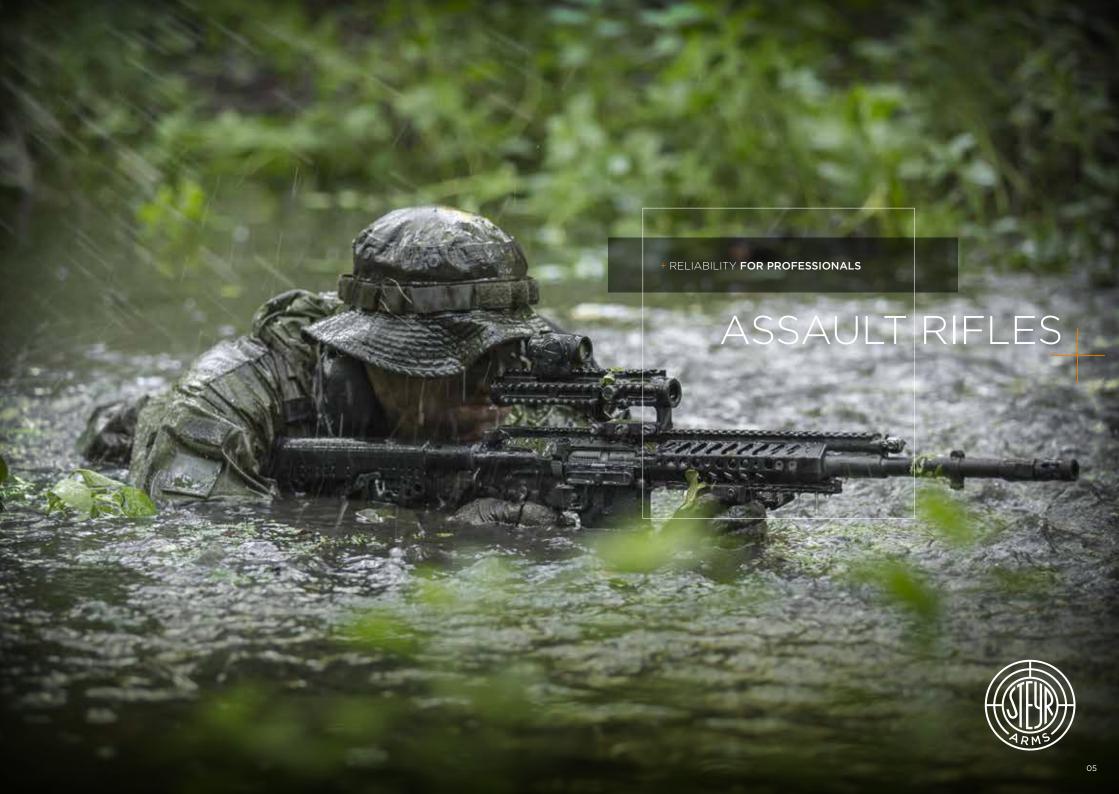





Combining the best of 2 worlds, the STEYR STM 556 is a standard assault rifle designed by STEYR ARMS and based on the M4/M16 platform with features of the for decades field proven STEYR ALIG

Thanks to it's adjustable short stroke piston system t is a very reliable and easy to maintain assault rifle. The monolithic upper receiver with the long Picatinnyrail gives the STM 556 extreme stability and strength to the system and the quick interchangeable barrel, as well as the ambidextrous operation (Safety, magazine and bolt release, ...) ensure maximum versatility.

A dry lubrification system guarantees reliable operation in all climatic conditions – from the coldest places or earth to dusty and sandy desert areas.









SPECIFICATIONS	STEYR STM 556			
Caliber	5,56x45 NATO			
Overall length	barrel length: 293 mm / 11.5" 356 mm / 14.5" 370 mm / 14.5" 417 mm / 16" 455 mm / 18" 508 mm / 20"	stock closed: 730 mm / 28.7" 786 mm / 31.4" 800 mm / 31.4" 860 mm / 33.9" 910 mm / 35.8" 950 mm / 37.4"	stock extended: 830 mm / 32.5" 886 mm / 34.9" 900 mm / 35.4" 960 mm / 37.8" 1010 mm / 39.8" 1050 mm / 41.3"	weight: 3,4 kg / 7.4 lb. 3,5 kg / 7.7 lb. 3,6 kg / 7.9 lb. 3,7 kg / 8.15 lb. 3,8 kg / 8.35 lb. 3,9 kg / 8.6 lb.
Overall height	218 mm, 8.58" (with	n 30 rds. magazine, v	without sights)	
Width	69 mm (2.7")			
Magazine (-capacity)	Detachable, synthetic (transparent), staggered box type, M4 compatible NATO standard 30 rounds			
Trigger	Steel hammer trigger mechanism, fires semiautomatic and full-automatic			
Safety	3 position ambidextrous safety and fire control selector lever (semi-and full-automatic).			
Stock	retractable, 100 mm, 6 positions			
Rate of fire	600-800 rounds per min			
Magazine weight empty	107 g / 3.78 oz			
Action	Short Piston, Gas-operated. Gas regulator with 5+1 action settings for firing, to guarantee proper function under all conditions			
Upper receiver	Monolithic type including two long NATO-accessory rails, sling attachment points (key hole interface optional) and steel bolt guide. Compatible with other lower receivers			
Bolt	Rotating bolt, with	seven locking lugs a	nd STEYR high press	sure safety system













STEYR AUG A3

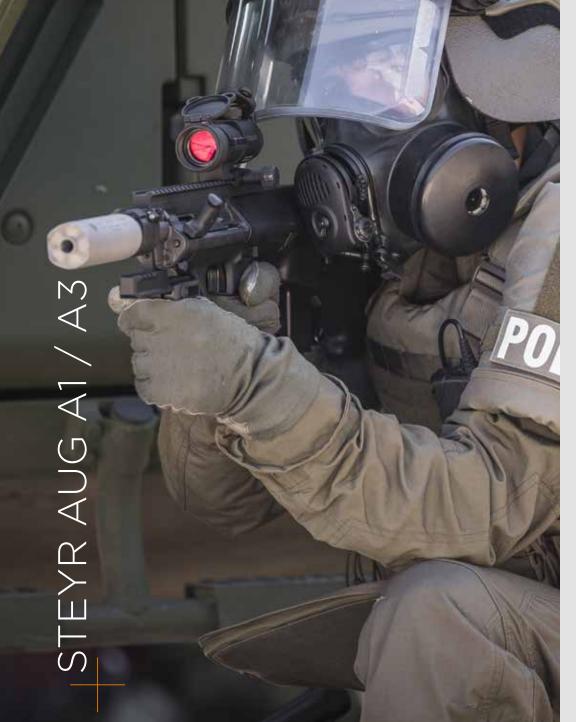

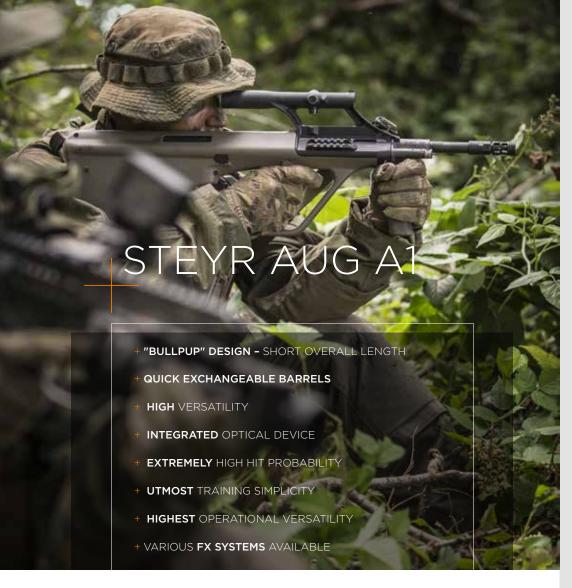

The STEYR AUG is a gas operated (short stroke piston) semi and fully automatic assault rifle with rotary bolt, quick changeable barrel and integrated optical sight. The "Bullpup" design makes it a short, well-balanced rifle with high reliability and accuracy. The AUG is famous for its modular concept which permits field stripping into the main groups within a few seconds without the use of any tools. The AUG is the standard weapon of many Armed Forces and Special Units all over the world since 1977.



SPECIFICATIONS	STEYR AUG A1			
Caliber	5.56x45 NATO/1 in 9" (optional 1 in 7")			
Overall length	barrel length: 382 mm / 15" 417 mm / 16" 508 mm / 20"	with stock: 690 mm / 27" 725 mm / 29" 790 mm / 31"	weight: 3.2 kg / 7.0 lbs. 3.3 kg / 7.3 lbs. 3.6 kg / 7.9 lbs.	
Barrel		Interchangeable, with gas regulator and swing/pivot type barrel grip. Cold hammer forged. Chromelined bore including chamber.		
Magazine	Detachable, synthetic (tra	Detachable, synthetic (transparent) staggered box type.		
Magazine (-capacity)	30 rounds, 42 rounds (optional)			
Trigger	"Pull through" trigger system. Fires semi automatic when pulled halfway to a clearly felt point, fires fully automatic when pulled fully back.			
Safety	2 or 3 position safety, Lat	2 or 3 position safety, Lateral push-through type locks trigger		
Stock	Synthetic, olive or black. Optional stock group for NATO magazines.			
Rate of fire	Automatic fire: 680-750 rounds per min. approx.			
Action	Gas-operated. Gas regulator with two action settings for firing to guarantee proper function under all conditions.			
Bolt	Rotary bolt, with seven locking lugs. The rifle can easily be changed from right to left hand ejection.			







The STEYR AUG A3 modula weapon system is a result o the continued developmen of the world renowned STEYR AUG rifle series

The STEYR AUG A3 design is also based on modular system components, which can be configured from one variant to another quickly and easily, without tools, and at unit level, in order to meet a wide range of future weapon requirements.

- **BULLPUP DESIGN -**SHORT OVERALL LENGTH
- SHORT NATO ACCESSORY RAIL AT 45° PICATINNY RAII
- + BOLT RELEASE BUTTON









The "Bullpup" design maintained its short overall length, without influencing the barrel length, to meet or exceed required accuracy standards. The STEYR AUG A3 features a number of Picatinny rails (Mil. Std. 1913 rails), which allow the quick and easy mounting of various accessories, such as illumination and target acquisition devices, including a variety of optics or night vision devices.

A bolt release button allows fast reloading of the rifle. Due to its utmost flexibility design concept, the STEYR AUG A3 is a state-of-the-art, multi-purpose assault rifle, for day and night operations. Armed forces and special operation units all over the world trust in the STEYR AUG platform.

SPECIFICATIONS	STEYR AUG A3		
Caliber	5.56x45 NATO / 1 in 9" or 1 in 7"		
Overall length	barrel length 382 mm / 15" 417 mm / 16.4" 508 mm / 20"	with stock 690 mm / 27" 725 mm / 29" 790 mm / 31"	weight 3,2 kg / 7.0 lbs. 3,3 kg / 7.3 lbs. 3,6 kg /7.9 lbs.
Barrel		regulator and swing / pivo omelined bore including ch	
Rifling	number of grooves 6, twist length, 1 turn right 228,6mm (9") Also available in 1 in 7"		
Magazine	Detachable, synthetic (transparent) staggered box type.		
Magazine (-capacity)	30 rounds, 42 rounds (optional)		
Trigger	"Pull through" trigger system. Fires semi automatic when pulled halfway to a clearly felt point, fires fully automatic when pulled fully back.		
Safety	3 position safety		
Stock	Synthetic, olive or black. (Synthetic, olive or black. Optional stock group for NATO magazines.	
Action	Gas-operated. Gas regulator with two action settings for firing to guarantee proper function under all conditions.		
Bolt	Rotary bolt, with seven locking lugs.		
Trigger mechanism	Synthetic (except for springs, steel bearing pins and catch holding open). Optional 3 rounds burst.		
Housing group	Receiver (housing) with 1.5 or 3x optical sight with ring reticle (integrated in the carrying handle). Original picatinny rail only (different length available)		



Designed for operations where caliber 9 mm is the best choice. No other 9 mm weapon gives such accuracy with high hit probability as the STEYR AUG A3 9mm carbine. High accuracy and extreme performance is achieved by a long barrel which gives a higher muzzle energy than any other 9mm weapon. The flash hider allows the use of quick attachable silencers. The closed bolt firing system gives the extra edge in accuracy and safety.

The sophisticated Picatinny rail system permits all options for attachment of optical sights, red dot sights, white lights and laser aiming devices. The muzzle device allows the use of quick attachable silencers and a bolt release button the fast reloading of the rifle.

+ "BULLPUP" DESIGN - SHORT OVERALL LENGTH

UTMOST TRAINING SIMPLICITY

+ HIGHEST OPERATIONAL VERSATILITY

+ QUICK EXCHANGEABLE BARRELS


+ ENHANCED 9X19 PERFORMANCE







SPECIFICATIONS	STEYR AUG A3 9mm		
Caliber	9x19 / 1 in 10"		
Overall length	Overall length: 640 mm / 25.2" 655 mm / 25.78" 710 mm / 27.95"	Barrel length: 350 mm, 13.8" 365 mm, 14.37" 420 mm, 16.5" Cold hammer forged. Chromelined bore including chamber. Other barrel lengths available	
Weight	with barrel 350 mm, 13,8": 2,9 kg, 6.4 lbs.		
Magazine	detachable, steel, staggered box type		
Magazine (-capacity)	25 rounds		
Trigger	"Pull through" trigger system. Fires semi automatic when pulled halfway to a clearly felt point, fires fully automatic when pulled fully back.		
Safety	3 position safety, Lateral push-through type locks trigger, integrated firing pin safety.		
Stock	Synthetic, black		
Rate of fire	Automatic fire: 650-720 rounds per minute		

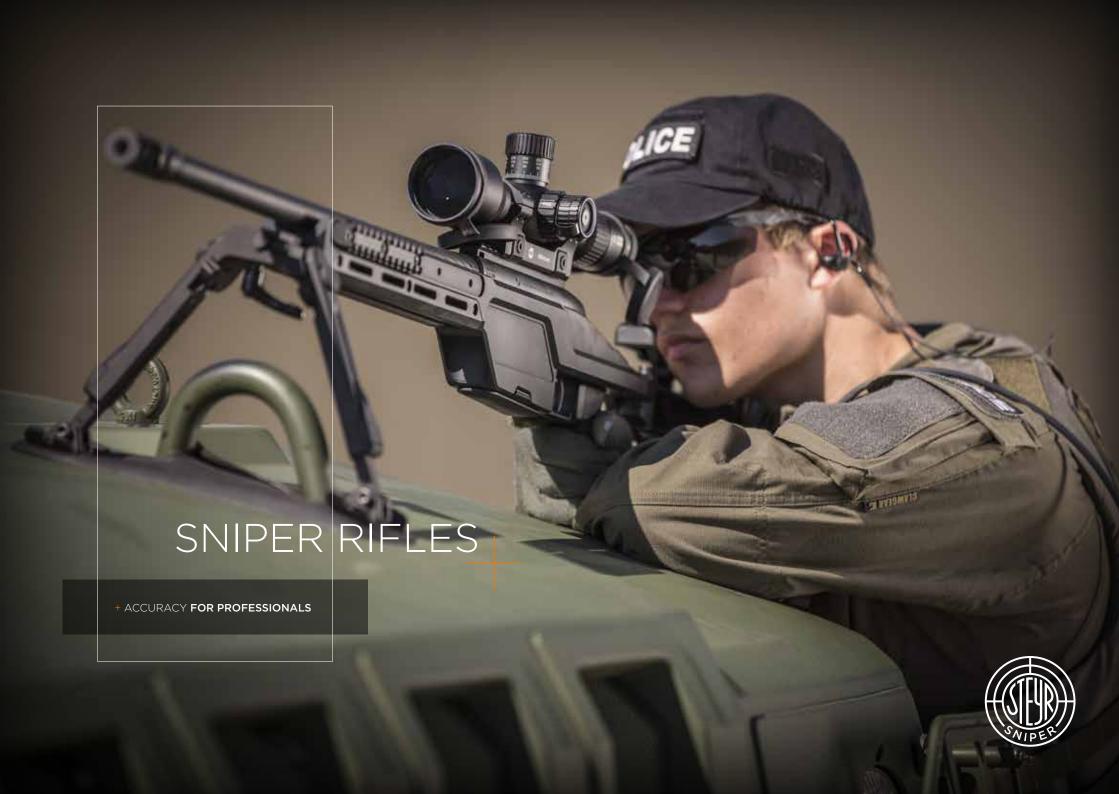













Barrel length: 508 mm, 20.00", 7,62x51 NATO



Barrel length: 690 mm, 27.2", 338 Lapua Mag. (8,6x70mm)





SPECIFICATIONS	STEYR SSG M1
Caliber	338 Lapua Mag. (8,6x70mm), 7,62x51 NATO
Overall length	Caliber 338 Lapua Mag. (8,6x70mm) With barrel 690 mm / 27.16": 1280 mm / 50.4" With folded stock: barrel 690 mm / 27.16": 1080 mm / 42.5" Caliber 7,62x51 NATO With barrel 600 mm / 23.62": 1190 mm / 46.85" With folded stock: barrel 635 mm / 25.00": 1225 mm / 48.22" With barrel 508 mm / 20.00": 1098 mm / 43.22" With folded stock": barrel 508 mm / 20.00": 898 mm / 35.35"
Barrel length	Interchangeable barrel and caliber 690 mm / 27.16", 338 Lapua Mag. (8,6x70mm) 635 mm / 25.00", 7,62x51 NATO 508 mm / 20.00", 7,62x51 NATO
Weight with magazine	6820 g / 15.04 lbs. with barrel 690 mm 6500 g / 14.33 lbs. with barrel 635 mm 6320 g / 13.93 lbs. with barrel 508 mm
Magazine (-capacity)	Detachable steel, double-column box magazine, 10 rounds
Trigger	Adjustable 2-stage triger
Safety	Trigger safety, bolt handle and firing pin lock
Stock	Aluminum, foldable, adjustable cheek piece and butt plate KeyMod or M-LOK FOREND
Twist rate	1 in 10" - 338 Lapua Mag. (8,6x70mm) 1 in 12" - 7.62x51 NATO
Picatinny rail system	For mounting of day optics and night vision. 30 MOA







SAFETY POSITION
By turning the rotary safety backward until a noticeable click can be felt, the safety is brought into loading position. Only the white dot on the safety is visible!



FIRING POSITION
The cocked weapon is ready for firing, when the red dot is visible. The
rotary slide is rotated fully forward.



OPTIMAL LOCK POSITION
Trigger is locked, bold cannot be

opened. To put the wapon on safe, the rotary safety slide on the butt neck must be rotated backward until the gray lock engages. The gray lock and the white dot on the safety are visible; the gray lock can also be felt as a protrusion for operation in darkness. In this position, the bolt cannot be opened. The set trigger is automatically uncocked when safety is on, the set trigger cannot be moved into set position.



LOCK POSITION + FIRING PIN SAFETY

For added "firing pin safety" the bolt handle can be moved closer to the stock in lock position and thus will be in optimal transport position. In this position, bolt handle and firing pin will be locked. If the

and firing pin will be locked. If the bolt handle is in "Firing pin safety" position, it will be automatically moved into firing position when activating the loading position ("Released").




The STEYR SSG 04 A1 has been specially designed to serve law enforcement application. It is built on the proven SBS system and features a heavy cold hammer forged barrel with a muzzle brake to accept silencers.



An extended Picatinny rail system (Mil. Std. 1913 rail) allows attachment of various day and night vision devices. A bipod, hi-capacity magazine and a fully adjustable buttstock is also standard as well as the outstanding adjustable trigger. Also available with a short 20 MOA toprail – the STEYR SSG 04 A1.

The fibreglass reinforced polymer stock in combination with the rugged locking system and match grade STEYR barrel guarantees perfect accuracy.

SPECIFICATIONS	STEYR SSG 04 A1
Caliber	7,62x51 NATO, .300 Win. Mag.
Overall length	1.083 mm (42.6") 7,62x51 NATO 1.175 mm (46.3") 7,62x51 NATO 1.265 mm (49.8") .300 Win. Mag.
Barrel length	508 mm (20") 7,62x51 NATO 600 mm (23.6") 7,62x51 NATO 690 mm (27.2") .300 Win. Mag.
Weight	4,7 kg (10 lbs) 7,62x51 NATO 4,9 kg (10.8 lbs) 7,62x51 NATO 5 kg (11 lbs) .300 Win. Mag.
Magazine (-capacity)	Detachable double-column box magazine 10 rounds 7,62x51 NATO 8 rounds .300 Win. Mag
Trigger system	2-stage trigger
Safety	Trigger safety, bolt handle and firing pin lock
Stock	Synthetic stock with adjustable cheek piece and adjustable butt plate

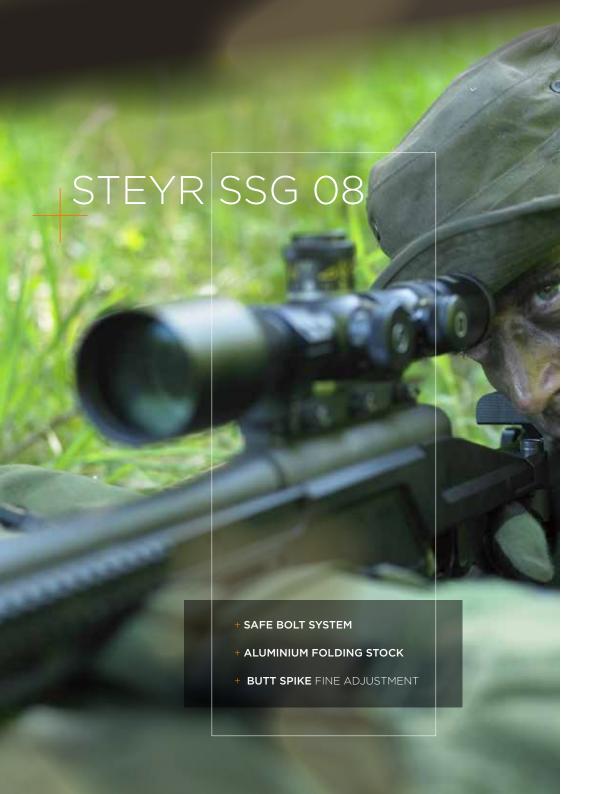





The STEYR SSG 08 is an extremely accurate bolt action rifle with detachable magazine and foldable high-strength aluminium stock. Due to the foldable stock t can be transported very comfortably. The cheek piece and the butt plate can be adjusted to meet the shooter's individual requirements. The bipod and the telescopic butt spike ensure a stable firing position. The ergonomic position of the user's hand.

The muzzle brake reduces the recoil of the rifle and accepts quick attachable silencers. The receiver features an integrated 20 MOA Picatinny poperail and additional rails on the fore-end for quick and secure mounting of various accessories. A night vision bridge for inline night vision devices is also available upon request.
















Foldable Aluminium Stock

Fixable high strength bipod

SPECIFICATIONS	STEYR SSG 08
Caliber	7,62x51 NATO, .300 Win. Mag., .338 Lap. Mag
Overall length	1.102 mm (43.4") 7,62x51 NATO 1.195 mm (47") 7,62x51 NATO, .300 Win. Mag. 1.280 mm (50.4") .300 Win. Mag., .338 Lap. Mag.
Barrel length	508 mm (20") 7,62x51 NATO 600 mm (23.6") 7,62x51 NATO., .300 Win. Mag. 690 mm (27.2") .300 Win. Mag., .338 Lap. Mag.
Weight without bipod and scope	5,46 kg (12 lbs) 7,62x51 NATO 5,6 kg (12.4 lbs) 7,62x51 NATO, .300 Win. Mag. 6,12 kg (13.5 lbs) .300 Win. Mag., .338 Lap. Mag.
Magazine (-capacity)	Detachable double-column box magazine 10 rounds 7,62x51 NATO, 8 rounds .300 Win. Mag., 6 rounds .338 Lap. Mag.
Trigger	2 stage trigger
Safety	Trigger safety, bolt handle and firing pin lock
Stock	Aircraft aluminium, foldable, adjustable cheek piece and butt plate, telescopic butt spike
Twist rate	1 in 12" 7,62x51 NATO, 1 in 10" .300 Win., 1 in 10" .338 Lap. Mag.
Picatinny rail system	For mounting of day optics and night vision
Surface finish	Steel components: MANNOX / Aluminium components: anodized black finish
Extras	Detachable bipod, muzzle brake to accept silencer, additional bridge mount for night vision devices available



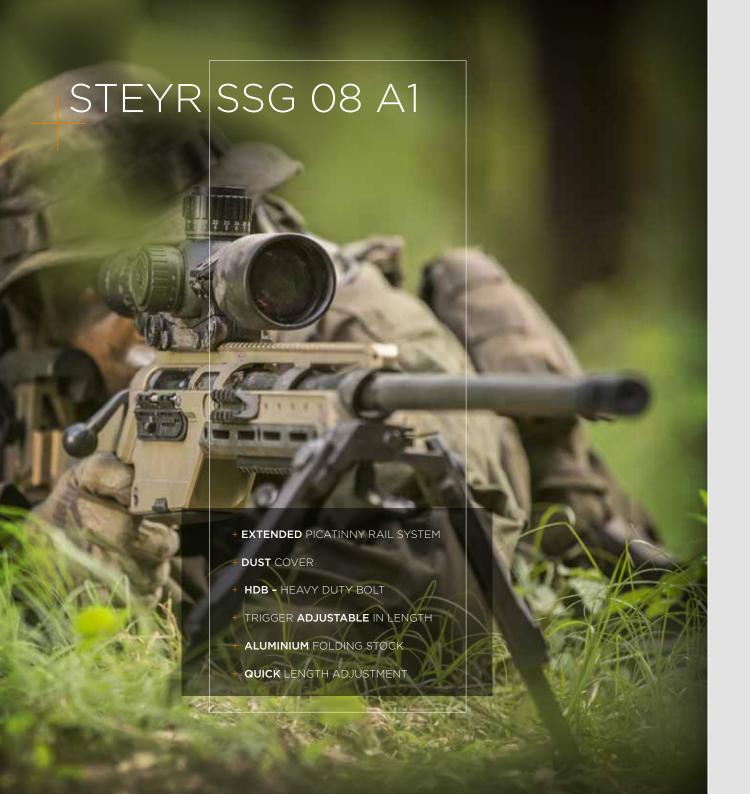















Foldable Aluminium Stock

Heavy duty bipod

	U		
THE PERMIT		SPECIFICATIONS	STEYR SSG 08 A1
		Caliber	7,62x51 NATO, .338 Lap. Mag.
(A A		Overall length	1.080 mm (42.5") 7,62x51 NATO 1.172 mm (46"), 7,62x51 NATO 1262 mm (49.7"), .338 Lap. Mag.
		Barrel length	508 mm (20") 7,62x51 NATO 600 mm (23.6"), 7,62x51 NATO 690 mm (27.2") .338 Lap. Mag.
		Weight without bipod and scope	5,7 kg (12.6 lbs) 7,62x51 NATO 6,9 kg (15.2 lbs), 7,62x51 NATO 7,4 kg (16.3 lbs) .338 Lap. Mag.
		Magazine (-capacity)	Detachable double-column box magazine 10 rounds 7,62x51 NATO 6 rounds .338 Lap. Mag.
		Trigger	2 stage triger
		Safety	Trigger safety, bolt handle and firing pin lock
Le H		Stock	Aircraft aluminium, foldable, adjustable cheek piece and butt plate, telescopic butt spike







The STEYR HS .50 MT is the most powerful sniper rifle produced by STEYR ARMS. With it's 5 round detachable magazine and multi purpose picatinny rail system it meets all requirements of a modern law enforcement and military long range sniper rifle. The sideloading 5 round magazine allows changing the magazine without moving the rifle. The rifle has a "Take down" design that allows easy disassembling for transport and same point of impact after reassembling.

The STEYR HS .50 M1 eatures:

- + 5 round magazine
- Multipurpose Picatinny rail system (20 MOA)
- Adjustable cheek piece
- Adjustable butt plate
- + Durable aluminium bipod
- + Adjustable monopod at the | buttstock

A STEYR ARMS made suppressor is available for the STEYR HS .50 M1.
A single shot version is also available (STEYR HS 50)

















Original STEYR ARMS suppressor



Side loading Magazine (low profile reloading)



5 round side loading magazine



Adjustable butt plate & monopod at the butt stock

SPECIFICATIONS	STEYR HS.50 M1
Caliber	.50 BMG, 12,7x99
Overall length	1500 mm / 59.4"
Barrel length	900 mm / 35.4"
Weight without scope	13,8 kg, 30.4 lbs
Height without scope	222,5 mm / 8.8"
Magazine (-capacity)	Detachable box magazine 5 rounds
Trigger	2 stage trigger
Safety	Triggersafety
Stock	Adjustable cheek piece / fixable bipod
NSN (Nato Stock number)	1005-41-002-1317
Picatinny rail system	For mounting of day optics and night vision





The newly designed STEYR PISTOL A2 MF series is the newest member in the STEYR ARMS product family. It is available in 3 sizes - (L-Large, M-Medium and C-Compact) with 17rnd magazine (9x19mm) respectively 15rnd magazine (.40 S&W), a real picatinny rail at the front side of the grip and a fully adjustable grip. The back strap as well as both sides of the grip are adjustable with different ergonomic sized inlays. The grip also features a funnel for a quick magazine change and is aggressively textured. The interchangeable magazine release allows an ambidextrous use.





SPECIFICATIONS	STEYR PISTOLS A2 MF
	142 mm / 5.6"
Overall height	142 11111 / 5.6
Width	33 mm / 1.3"
Magazine capacity	17 rounds, optional 10 rounds
Trigger	Reset action system (special double action system)
Safety	Trigger safety and drop safety, optional: manual trigger safety
Grip frame	Synthetic grip with changeable side-plates and back-straps

SPECIFICATIONS	STEYR PISTOL L-A2 MF	STEYR PISTOL M-A2 MF	STEYR PISTOL C-A2 MF
Caliber	9x19, .40 S&W	9x19, .40 S&W	9x19, .40 S&W
Overall length	200 mm / 7.9"	187 mm / 7.4"	177 mm / 7.0"
Barrel length	115 mm / 4.5"	102 mm / 4.0"	92 mm / 3.6"
Weight	785g / 27.7 oz	780g / 27.5 oz	766g / 27.0 oz







Following a long tradition of manufacturing pistols, the STEYR PISTOL features all characteristics of a modern handgun such as low slide design, unique safety solutions and a grip design which results in great natural "point-ability". STEYR L-A1 is the full size STEYR PISTOL.

The pistol is available in different sizes: The STEYR L-A1 is the full size STEYR PISTOL, the STEYR PISTOL M-A1 features a slightly shorter barrel and high magazine capacity (up to 17 rounds), the compact STEYR PISTOL C-A1 has the full magazine capacity, but the shortest available slide and barrel. The STEYR PISTOL S-A1 is the subcompact version of STEYR PISTOLS, ideal for concealed carriage.











Unique triangular sights (standard)



Rectangular sights (also available with Tritium)



Adjustable sights



Loaded chamber indicator



Key lock system



Automatic trigger safety



Optional manual safety



SPECIFICATIONS	STEYR PISTOLS
Trigger	Double Action Only (DAO)
Safety	Trigger safety, drop safety and limiting trigger access lock
Width	33 mm / 1.3"
Grip Frame	Synthetic grip
Surface Finish	MANNOX™ surface treatment, 99% salt water resistant
Trigger pull (constant)	approx. 2,5 kg / approx. 5.5 lbs.

SPECIFICATIONS	STEYR PISTOLS L9-A1	STEYR PISTOLS M9-A1
Caliber	9x19 mm	9x19 mm
Overall length	200,5 mm / 7.9"	187 mm / 7.36"
Overall height	142 mm / 5.59"	142 mm / 5.59"
Barrel length	115 mm / 4.53"	102 mm / 4"
Weight (empty magazin)	787g / 28.76 oz	766 g / 27.02 oz
Magazine capacity	17 rounds	17 rounds

SPECIFICATIONS	STEYR PISTOLS C9-A1	STEYR PISTOLS S9-A1
Caliber	9x19 mm	9x19 mm
Overall length	172 mm / 6.8"	172 mm / 6.8"
Overall height	132 mm / 5.2"	123 mm / 4.8"
Barrel length	92 mm / 3.6"	92 mm / 3.6"
Weight (empty magazin)	769 g / 27.02 oz	744 g / 26.25 oz
Magazine capacity	17 rounds	10 rounds

SPECIFICATIONS	STEYR PISTOLS L40-A1	STEYR PISTOLS M40-A1
Caliber	.40 S&W	.40 S&W
Overall length	200,5 mm / 7.9"	187 mm / 7.36" (191 mm / 7.52" Canada)
Overall height	136 mm / 5.35"	136 mm / 5.35"
Barrel length	115 mm / 4.53"	102 mm / 4" (106 mm / 4.17" Canada)
Weight (empty magazin)	801 g / 28.26 oz	774 g / 27.31 oz
Magazine capacity	12 rounds	12 rounds

SPECIFICATIONS	STEYR PISTOLS \$40-A1
Caliber	.40 S&W
Overall length	175 mm / 6.9"
Overall height	123 mm / 4.8"
Barrel length	96 mm / 3.78"
Weight (empty magazin)	758 g / 26.74 oz
Magazine capacity	10 rounds







Developed by STEYR ARMS the STEYR GL 40 is a light weight 40mm low velocity grenade launcher. Due to it's design and various mounting options it can be used as an under barrel launcher for the STEYR AUG or various other assault rifle.

The STEYR GL 40 is also available as a stand alone

grenade launcher with an ergonomic adjustable stock.

It is available either with a Steyr designed quick attach mount or a mount for picatinny rail (Mil. Std. 1913). Thanks to the safe and easy sideloading breech configuration all types of 40 mm grenades can be used. This provides superior combat capabilities.




SPECIFICATIONS	STEYR GL 40
Caliber/Twist Rate	40x46 mm LV
Overall length	270 mm / 10.6"
Barrel length	180 mm / 7.1"
Rifling	6 grooves, rh, 1 turn in 1,2 m
Trigger	DAO - double action only
Safety	100% ambidextrous Blocking the Hammer, Transfer bar between the Hammer and the firing pin (actuated via trigger)
Operation	Breech loading, break-action barrel

SPECIFICATIONS	STEYR GL 40 MIL. STD. 1913 MOUNT
Weight Launcher	1040 g / 36.68 oz
Added weight to the rifle for the Mounting clamps (AUG 20" Barrel)	105 g / 3.70 oz
Weight Stand-Alone Stock	140 g / 4.93 oz
Weight Stand-Alone ready to fire	1140 g / 40.21 oz
Length Stand-Alone overall	2180 g / 76.89 oz

SPECIFICATIONS	STEYR GL 40 QUICK-MOUNT
Weight Launcher	1020 g / 35.97 oz
Added weight to the rifle for the Mounting clamps (AUG 20" Barrel)	85 g / 2.99 oz
Weight Stand-Alone Stock	1160 g / 40.91 oz
Weight Stand-Alone ready to fire	2180 g / 6.89 oz
Length Stand-Alone overall	Collapsed: 545 mm / 21.5"; Extended: 640 mm / 25.2"



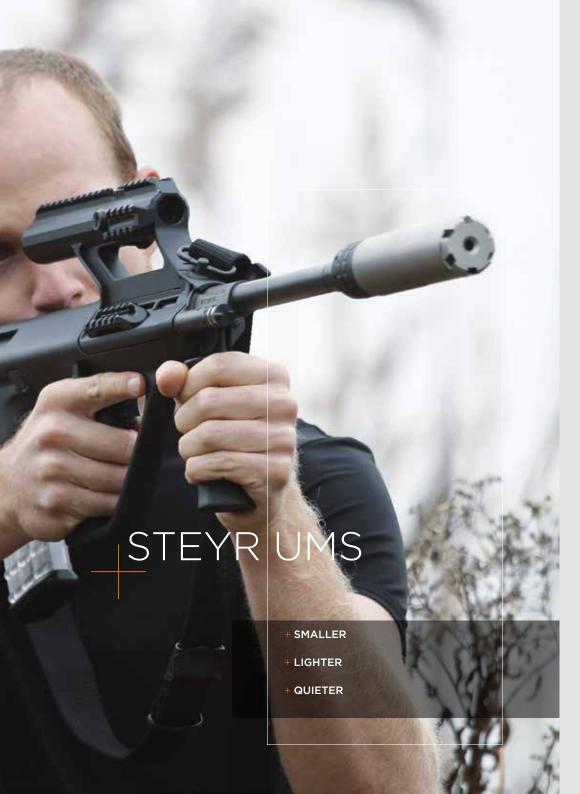





STEYR UMS

The STEYR UMS is a highly effective military grade suppressor. Due to its unique design there is nearly no backpressure to the weapon (for automatic weapons) which does not influence the lifetime of the weapon. It can be easily disassembled for cleaning or for renewing parts. The STEYR UMS is lighter and suppresses more sound than comparable other suppressors with the same measurements being ultra durable.

SPECIFICATIONS	STEYR UMS
Caliber	5.56, 300 BLK, 7.62 and .338
Weight	580 g / 1.28 lbs
Diameter	40 mm / 1.6"
Overall length of suppressor	180 mm / 7.1"
Added length to weapon	130 mm / 5.1"
Average sound suppression	23 dB (A) 1m right of the muzzle, 25 dB (A) by the shooters ear
Mount	QD for STEYR muzzle device

